

ReceiptNOW® Printers

Teller Receipt Printers



ReceiptNOW printers add thermal receipt printing to your check scanner. Engineered to fit underneath Digital Check®, SmartSource® or TellerScan® scanners, the stackable design allows users to combine their scanner and receipt printer into the desktop footprint of a single device.



CUSTOMIZE RECEIPTS

ReceiptNOW printers enable users to customize the look and feel of their receipts. Options include top and bottom logos, border messages, watermarks, and Windows TrueType fonts.



STACKABLE DESIGN OPTIONS

ReceiptNOW printers are engineered to fit beneath your check scanner so you can enjoy a cleaner, more efficient workspace. ReceiptNOW is available in two form factors, each designed to fit beneath a range of SmartSource and TellerScan products.

KEY FEATURES & BENEFITS

- **USB and Optional Ethernet Connection Ports**
- **Modular Design Saves Counter Space**
- **Easy Slide-Out Drawer for Paper Replacement**
- **Economical and Easy Thermal Printing**
- **Print Graphics on Your Receipts**
- **Engineered for Durability**

Compatibility

- USB or optional Ethernet interface
- Full 108 standard and international fonts with barcode
- Compatible with international power standards
- Worldwide certifications

USB and/or Ethernet Connectivity

The ReceiptNOW printer offers flexibility for different environments. This printer includes options for both Ethernet and USB-connected configurations.

Features

- Quiet thermal receipt printer
- Frees up teller space
- Simple pull-out, drop-in paper
- Fits the largest receipt paper rolls
- Full or partial paper cut

DATA FINANCIAL, INC.

ReceiptNOW® Printers


Configuration Options



1

ReceiptNOW Elite

USB and/or Ethernet Configurations

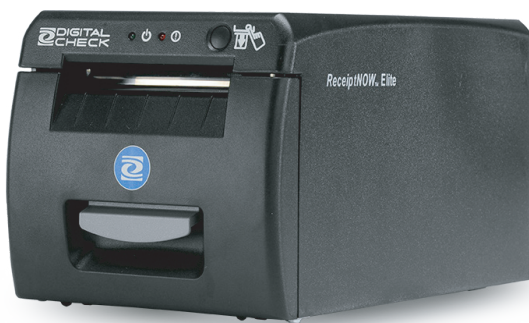

Part Numbers

SRNELITE-USB (ReceiptNow Elite with USB)
SRNELITE-ETH2-E (ReceiptNOW Elite, USB and Ethernet)

Supported Scanners

- SmartSource Elite
- SmartSource Pro Elite
- SmartSource Pro Elite Plus
- SmartSource Expert Elite
- TellerScan TS500

Ethernet Configuration Option for ReceiptNOW



(ReceiptNOW Rear View)

The ReceiptNOW Elite with Ethernet configuration is network-ready, and comes with two rear Ethernet ports, allowing you to connect the printer with the **Expert Elite (Ethernet) or Pro Elite Plus (Ethernet Convertible)** scanner on the same line.

2

ReceiptNOW (original)

USB Configuration



Part Numbers

SRN2PTR-USB (ReceiptNow original with USB)

Supported Scanners

- SmartSource Professional
- TellerScan TS240

DATA FINANCIAL, INC.

ReceiptNOW[®] Printers

Specifications



Printer Dimensions

ReceiptNOW Elite

Height: 5.7 in (14.48 cm)
Width: 5.3 in (13.46 cm)
Length: 10.5 in (26.67 cm)

ReceiptNOW (original)

Height: 5.4 in (13.72 cm)
Width: 6.1 in (15.5 cm)
Length: 15.3 in (38.86 cm)

Printing / Feed / Cut

Direct Thermal Printer
Maximum print speed is 250mm/sec. (ReceiptNOW Elite)
Resolution: 203 x 180 dpi
95 Alphanumeric, 13 International Characters with Kanji
TrueType Fonts available when being driven as a Windows printer
1D/2D Bar Code Fonts
512K On-board Logo Flash
Full/Partial Auto Cutter

Controls

On/Off Switch
Paper Empty/Low LEDs with audible alerts
Paper Feed Button
Paper Width Adjustment
Power Indicator

Paper / Loading

Standard, Security, Non-BPA, 2-color Paper
Paper Widths: 2.4 in to 3.25 in (6.1 cm to 8.3 cm)
Paper Roll Diameter: 3.25 in (8.3 cm)
Slide Out Tray, Drop-in Paper

Interface

USB and/ or Ethernet (ReceiptNow Elite)
USB only (ReceiptNow Original)
Standard ESC/POS Command Set
OPOS & JavaPOS, Auto Status Back (ASB)

Included Accessories

USB 2.0 cable (ReceiptNow Elite USB or Ethernet & ReceiptNow (original))
1 ft. Ethernet cable (ReceiptNow Elite Ethernet)
International 100-240VAC, 50/60Hz power supply

Graphic Receipt Customization

Multiple Graphics Can be Placed Anywhere
Custom Messages
Watermarks

Supported Operating Systems

Windows 11, Windows 10 (32/64 bit)

Environmental

Operating Temperature: 41° - 104° F (5° - 40° C)
Operating Humidity: 20 - 90% non-condensing

Certifications

Safety:
UL, cUL, CE

Emissions:
FCC: Class B
ICES-003
CE
VCCI

Power Supply Efficiency:

DOE Level VI

RoHS Compliant

Part Numbers

SRNELITE-USB (ReceiptNOW Elite with USB)
SRNELITE-ETH2-E (ReceiptNOW Elite, USB and Ethernet)
SRN2PTR-USB (ReceiptNOW Original with USB)